

PEOPLE ENTRANCE MANAGEMENT SYSTEM

V-PM2300-FTST3

FULL HEIGHT DUAL LANE TURNSTILE GATE BARRIER



FEATURES

Designed for seizure operation with aesthetics in mind

Corrosion protected S/S frame

Minimal exposed hardware

Heavy gauge materials meeting ASTM standard

Consist of rotar assembly and shield

Assembly, barrier section, mechanism housing and ceiling plate

Dual lane operation for independent to and from operations

Integration support with any RFID/Biometric Reader through NO input

IP44 Ingress Protection rating



LED Direction
Indicators

INGRESS
PROTECTION
RATING

IP44



100%
Duty Cycle



Delay Time



Wired
Terminal

TECHNICAL SPECIFICATIONS



V-PM2300-FTST3

Parameter	Specifications
Power Supply	100V~240V AC
Power consumption	30W
Operating temper range	-25~+70℃
Protection level	IP44
Humidity	95%
Solenoid	24v DC 100%
Signal Output	12v pulse
Passage width	<650mm
Frequency	50 or 60 Hz
Electro-magnetic drive	DC
Dimension	2100 x 1500 x 2310 mm
Certifications	CE, FCC, ROHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

DIMENSIONS

Unit: mm

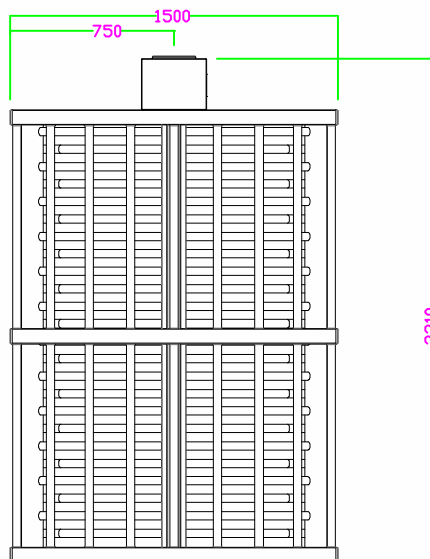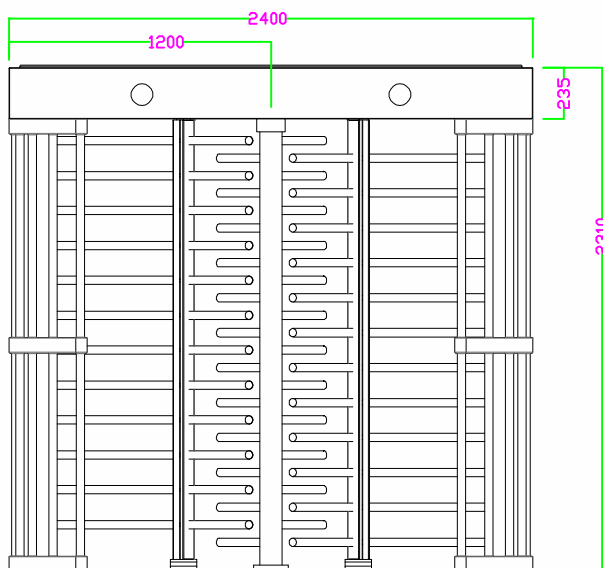

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO 14001 : 2004 CERTIFIED COMPANY)

